

ZK-R21E 2.1 声道 50Wx2+100W 低音炮蓝牙音频功放

Wuzhi Audio APP 下载二维码

Wuzhi Audio APP download



2.1声道 蓝牙音频功放

50W+50W+100W低音炮

ZK-R21E

高清音质
炫酷指示灯



蓝牙
5.1

AUX
输入

U盘
播放

USB
声卡

赠送炫酷APP

外壳需自己组装

目录

ZK-R21E 2.1 声道 50Wx2+100W 低音炮蓝牙音频功放.....	1
目录	2
产品对照表.....	3
高端音响体验	4
旋钮操作介绍	5
散热面积更大更充分	6
产品功能.....	7
产品参数.....	8
安装示意图.....	9
APP 设置界面	10

1. 产品对照表

产品对照表

...

型号	R302	R502E	R502H	R21E	R21H
图片					
特色功能	支持Wuzhi Audio APP				
功放芯片	TPA 3118	国产芯片	TPA 3116D2	国产芯片	TPA 3116D2
音频输入	蓝牙5.1+AUX+U盘+USB声卡				
声道数	高低音调2.0声道			2.1声道带低音炮	
功率输出	30W+30W	50W+50W	50W+50W	50W+50W+100W	
适配电源	9-24V/≥3A	9-24V/≥3A	9-24V/≥3A	9-24V/≥7A	9-24V/≥7A
适配喇叭	10-50W 4-8Ω	10-50W 4-8Ω	10-50W 4-8Ω	左右声道 15-50W, 4-8Ω 低音炮 30-100W, 4-8Ω	
音量调节	多功能旋钮，360度无级调音，带音量等级指示。 单击：播放/暂停 双击：模式切换 (蓝牙/U盘/AUX) 长按1秒：开/关机 旋转：调节音量大小				
保护机制	过温，过流，短路，防静电保护				
尺寸	81*81*34mm	81*81*34mm	81*81*34mm	81*81*37mm	81*81*37mm
重量 (含包装)	126g	127g	130g	129g	150g

2. 高端音响体验




3. 旋钮操作介绍



4. 散热面积更大更充分


散热面积更大更充分

...

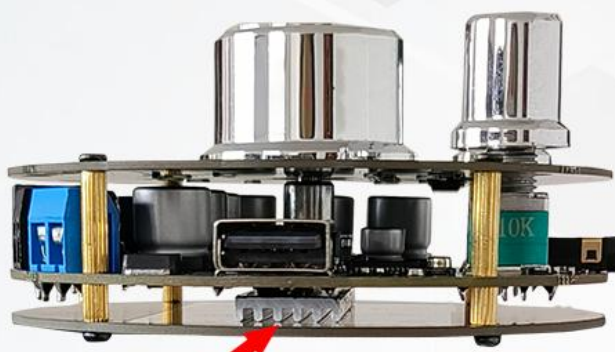

散热片紧贴外壳辅助散热,底部通风不密封!

底部散热, 散热面积更大, 更充分!

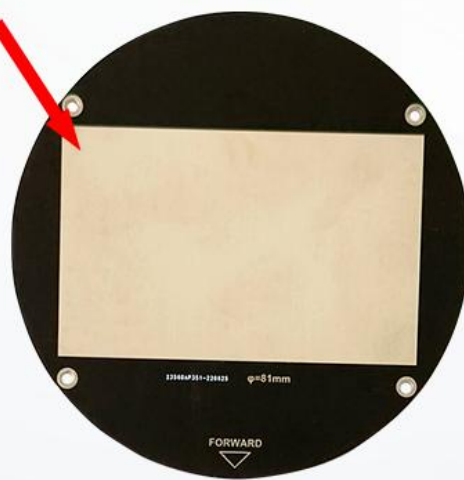

55x13mm散热片


5. 产品功能



6. 产品参数

产品参数 ...	
	
品牌：	Wuzhi Audio
型号：	ZK-R21E
名称：	2.1声道50W+50W+100W低音炮立体声蓝牙音频功率放大器
功放芯片：	国产芯片
蓝牙版本：	5.1
音频输入：	蓝牙+AUX+U盘+USB声卡
音频输出：	左声道50W+右声道50W+低音炮100W
适配电源：	DC9-24V，≥7A (不可接交流电)
适配喇叭：	左右声道15-50W， 4-8Ω; 低音炮30-100W， 4-8Ω
音量调节：	多功能旋钮，360度无级调音，带音量等级指示。 单击：播放/暂停 双击：模式切换 (蓝牙/U盘/AUX) 长按1秒：开/关机 旋转：调节音量大小
保护机制：	过温，过流，短路，防静电保护
特色功能：	支持Wuzhi Audio APP。修改蓝牙名称，密码设置，提示音音量调节，开/关提示音，助眠曲，音效选择+自定义音效，U盘播放列表，音量指示灯亮度调节。
产品尺寸：	81x81x37mm
产品重量：	净重85g，含包装129g


7. 安装示意图

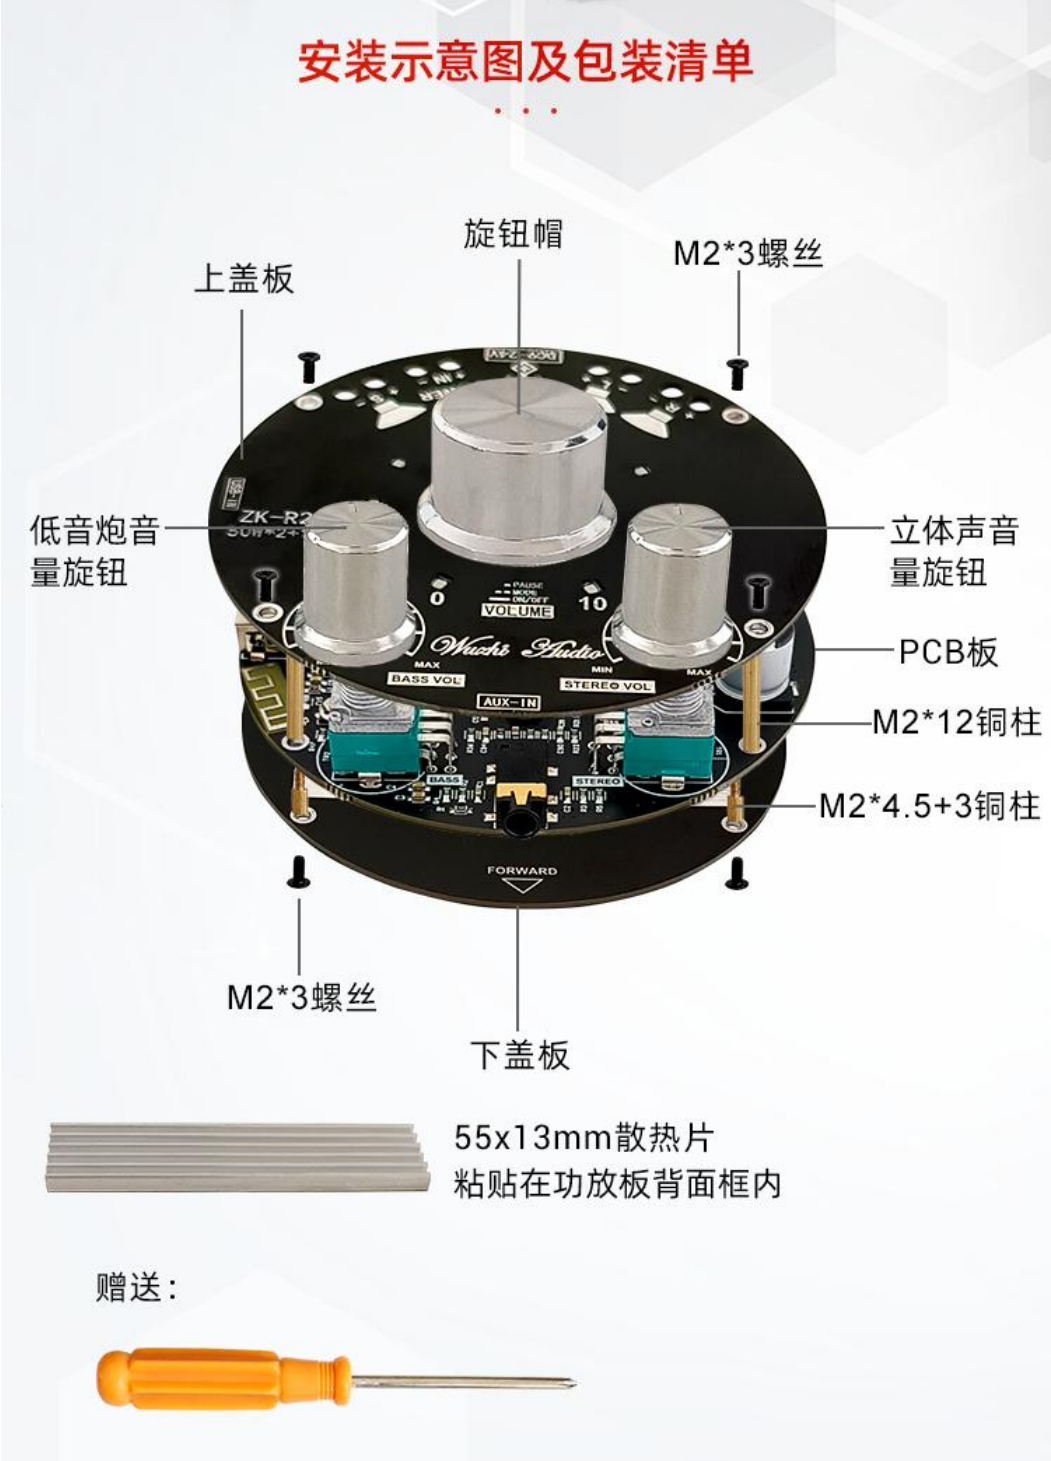

8. APP 设置界面

APP 设置界面

...

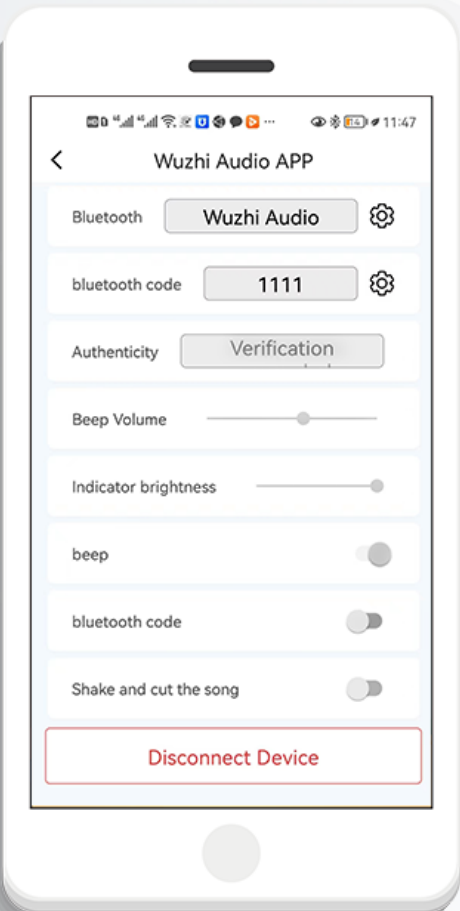

Bluetooth Wuzhi Audio

bluetooth code 1111

Authenticity Verification

Beep Volume

Indicator brightness

beep

bluetooth code

Shake and cut the song

Disconnect Device

蓝牙名称修改步骤

【输入新蓝牙名称】→【点设置按钮】→系统自动重启→【手机蓝牙取消与原蓝牙名称配对】→【找到新蓝牙名称重新配对】

蓝牙密码设置步骤

方法一：
【打开蓝牙密码开关】→使用默认密码 1111

方法二：
【打开蓝牙密码开关】→【输入密码】→【点设置按钮】→系统自动重启→【取消配对，再次连接会提示输入密码】

ZK-R21E 2.1 channel 50Wx2+100W subwoofer BT audio power amplifier

2.1 channel BT audio amplifier

ZK-R21E

50W+50W+100W Subwoofer

HD sound quality

Indicator light



BT
5.1

AUX
input

USB
disk

Sound
card

Free:Cool APP

The shell needs to be assembled by yourself

Catalogue

ZK-R21E 2.1 channel 50Wx2+100W subwoofer BT audio power amplifier	11
Catalogue	12
Product comparison table.....	13
High end audio experience.....	14
Introduction to knob operation	15
Larger and more sufficient heat dissipation area.....	16
Product functions	17
Product parameters.....	18
Installation diagram.....	19
APP setting interface.....	20

1. Product comparison table

Product comparison table

...

Model	R302	R502E	R502H	R21E	R21H
Picture					
Features	support Wuzhi Audio APP				
Amplifier chip	TPA 3118	Chinese chip	TPA 3116D2	Chinese chip	TPA 3116D2
Audio input	BT5.1+AUX+USB disk+USB sound card				
Channels	Treble-bass adjustment 2.0 channels			2.1 channel with subwoofer	
Power output	30W+30W	50W+50W	50W+50W	50W+50W+100W	
Power supply	9-24V/≥3A	9-24V/≥3A	9-24V/≥3A	9-24V/≥7A	9-24V/≥7A
Speaker	10-50W 4-8Ω	10-50W 4-8Ω	10-50W 4-8Ω	L&R channel 15-50W, 4-8Ω Subwoofer 30-100W, 4-8Ω	
Volume adjustment	multi-function knob, 360 degree stepless tuning, with volume level indication. Click: play / pause Double click: mode switch (BT, USB disk, AUX) Long press for 1 second: on/off Rotate: adjust volume				
Protection	Over temperature, over-current, short circuit, anti-static protection				
Size	81*81*34mm	81*81*34mm	81*81*34mm	81*81*37mm	81*81*37mm
Weight (With package)	126g	127g	130g	129g	150g

2.High end audio experience

High end audio experience

The diagram illustrates the high-end audio experience. At the top, a circular speaker is shown with a volume level indicator. A red line points to the indicator, labeled "Volume level indicator". Below the speaker, two smartphones are shown displaying the Wuzhi Audio APP interface. The left smartphone shows the main playback screen with a volume slider. A red box highlights the volume slider, and a red arrow points to it from the text "Volume indication is synchronized with app". The right smartphone shows the settings screen with a red box highlighting the "Indicator brightness" slider. A red arrow points to it from the text "App can set 8 levels of brightness".


Volume level indicator

Volume indication is synchronized with app

App can set 8 levels of brightness


Note: Plug free installation. The copper column is used as the connecting wire. Try not to clamp the two copper columns by hand when adjusting the volume, otherwise the normal display may be affected.

3.Introduction to knob operation

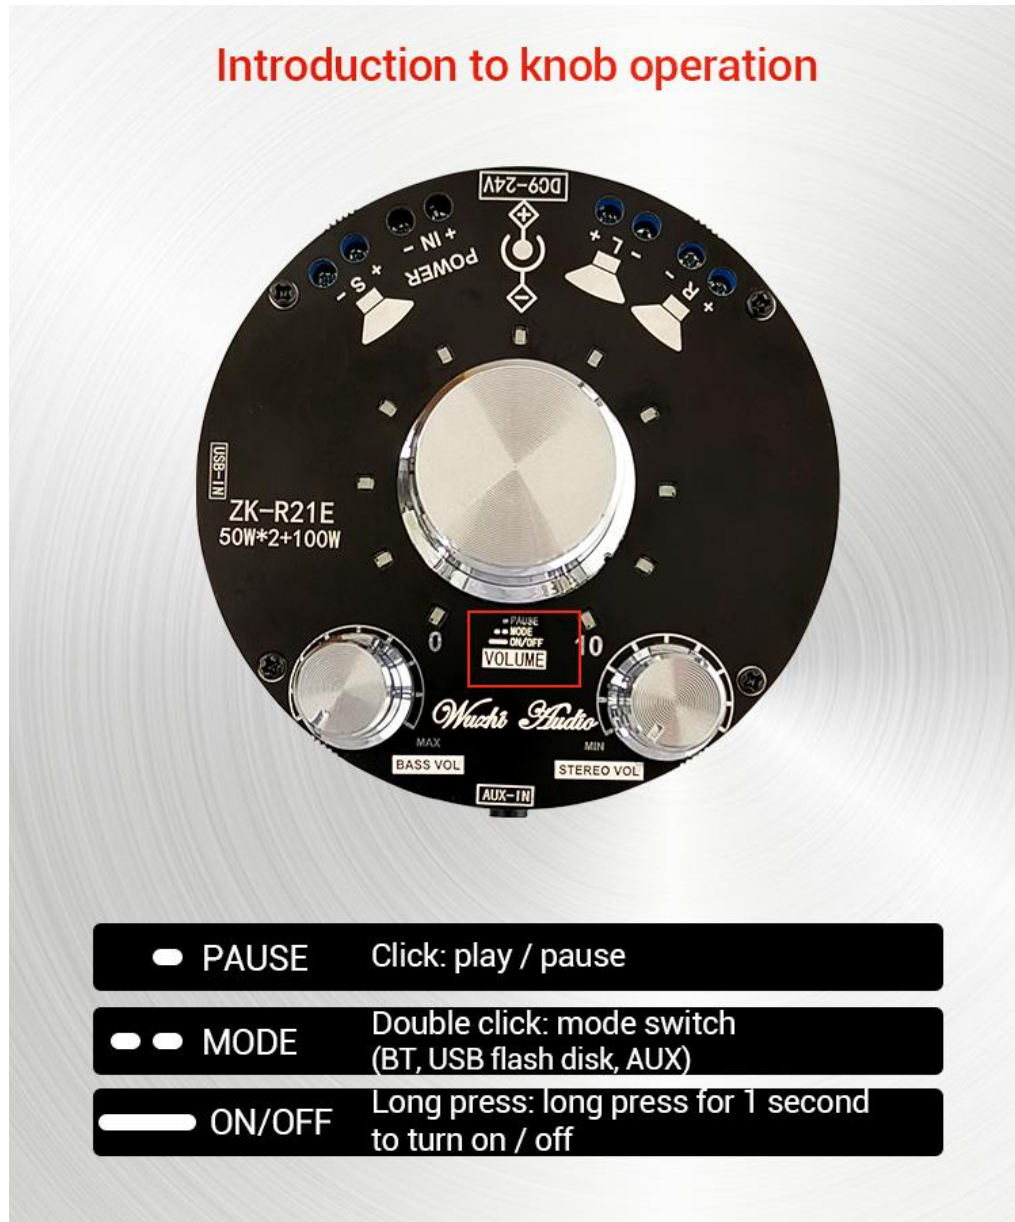



4. Larger and more sufficient heat dissipation area

Larger and more sufficient heat dissipation area

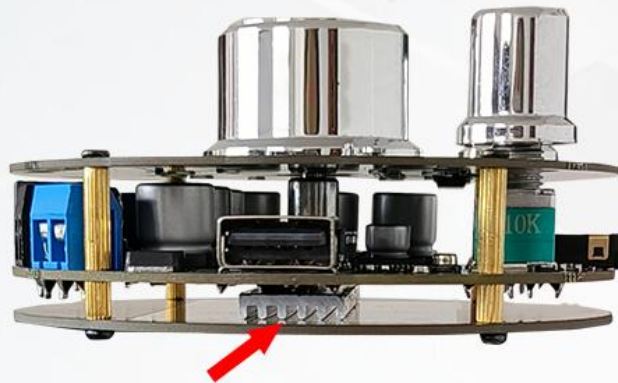


The heat sink is close to the shell to assist the heat dissipation, and the bottom ventilation is not sealed.

Bottom heat dissipation, larger and more sufficient heat dissipation area!

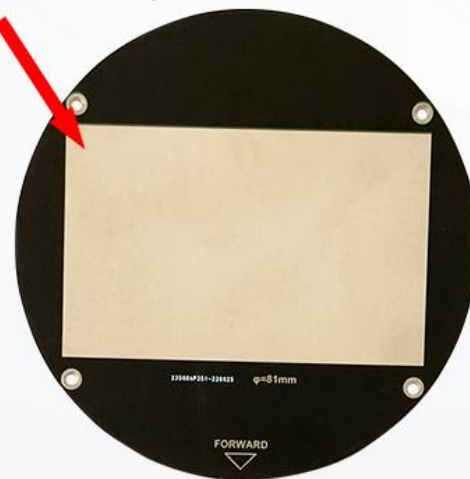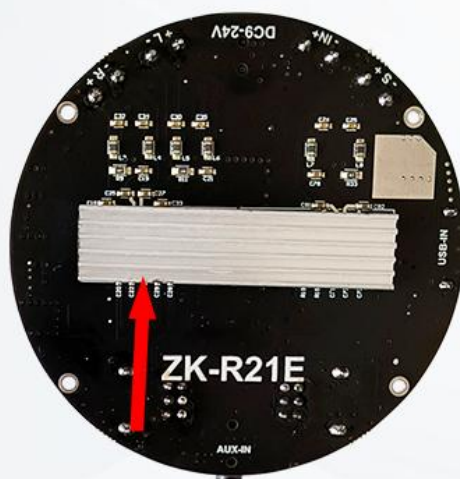

55x13mm heat sink


5.Product functions

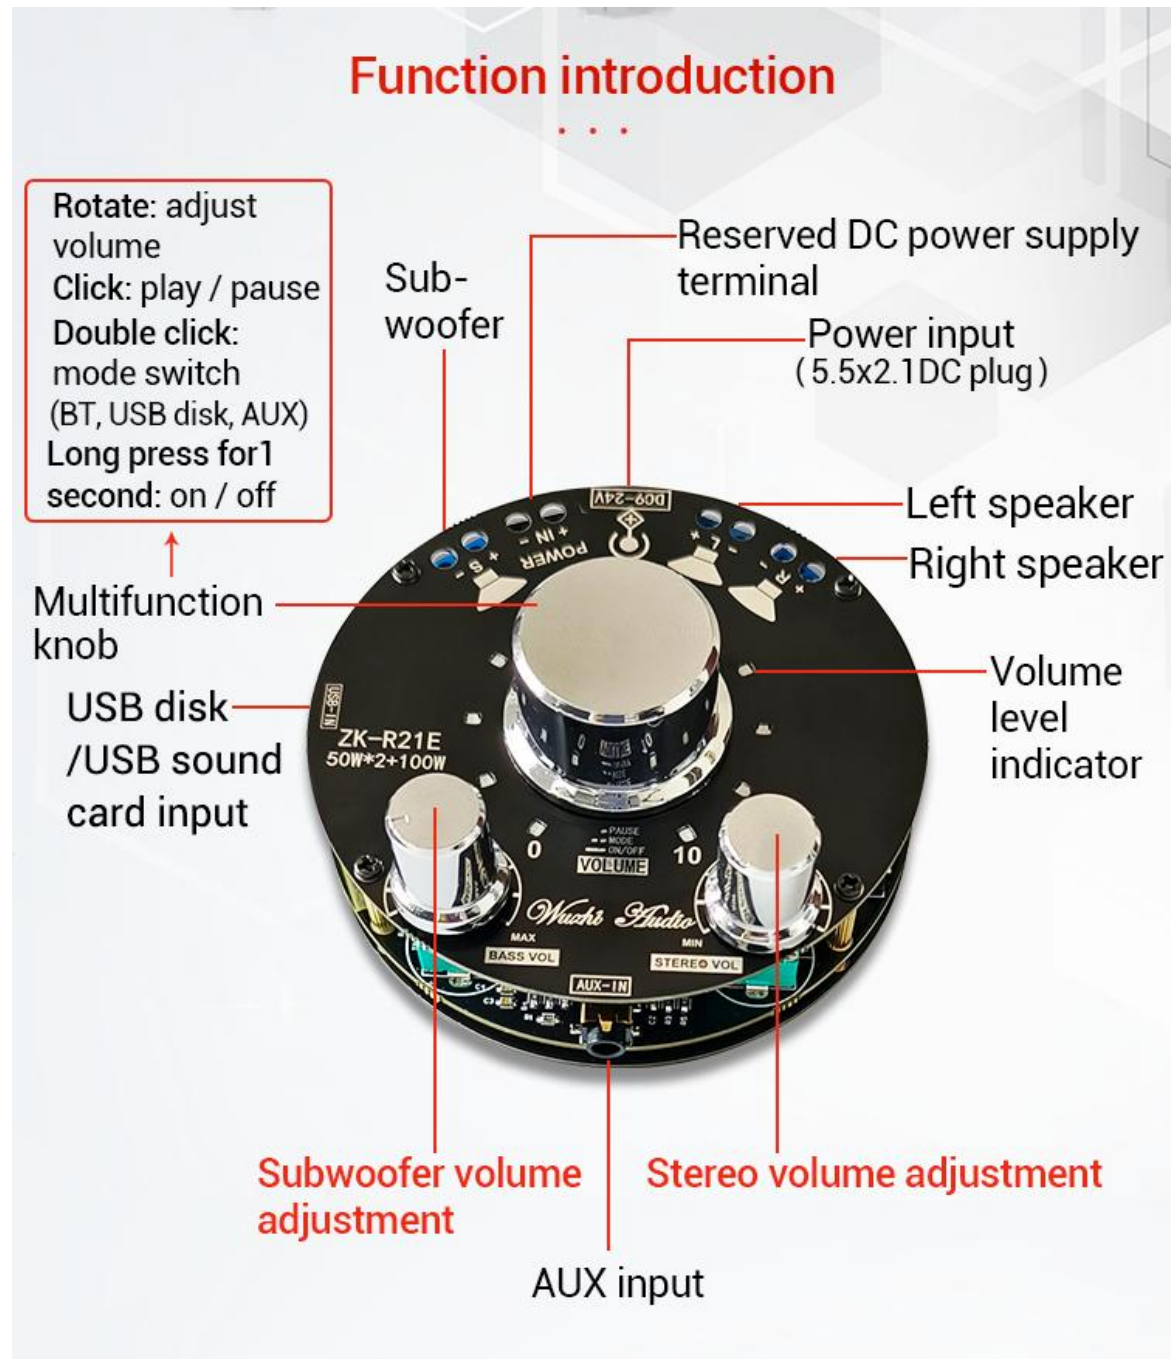

6.Product parameters

Product parameters ...  Φ81mm 37mm Φ81mm	
Brand:	Wuzhi Audio
Model:	ZK-R21H
Name:	2.1 channel 50Wx2+100W stereo BT audio power amplifier
Amplifier chip:	Chinese chip
BT version:	5.1
Audio input:	BT+AUX+USB disk+USB sound card
Audio output:	Left channel 50W+right channel 50W+Subwoofer 100W
Adaptive power supply:	DC9-24V, ≥7A (Do not connect to AC)
Adaptive speaker:	Left and right channels 15-50W, 4-8Ω; Subwoofer 30-100W, 4-8Ω
Volume adjustment:	multi-function knob, 360 degree stepless tuning, with volume level indication.
Click:	play / pause Double click: mode switch (BT, USB flash disk, AUX)
Long press for 1 second:	on/off Rotate: adjust volume
Protection mechanism:	Over temperature, over-current, short circuit, anti-static protection
Characteristic function:	Support Wuzhi Audio APP. Modify BT name, password setting, prompt tone volume adjustment, on/off prompt tone, lullaby, sound effect selection+custom sound effect, USB flash disk playlist,volume indicator brightness adjustment.
Size:	81x81x37mm
Product weight:	Net weight 85g,Weight with package 129g


7. Installation diagram

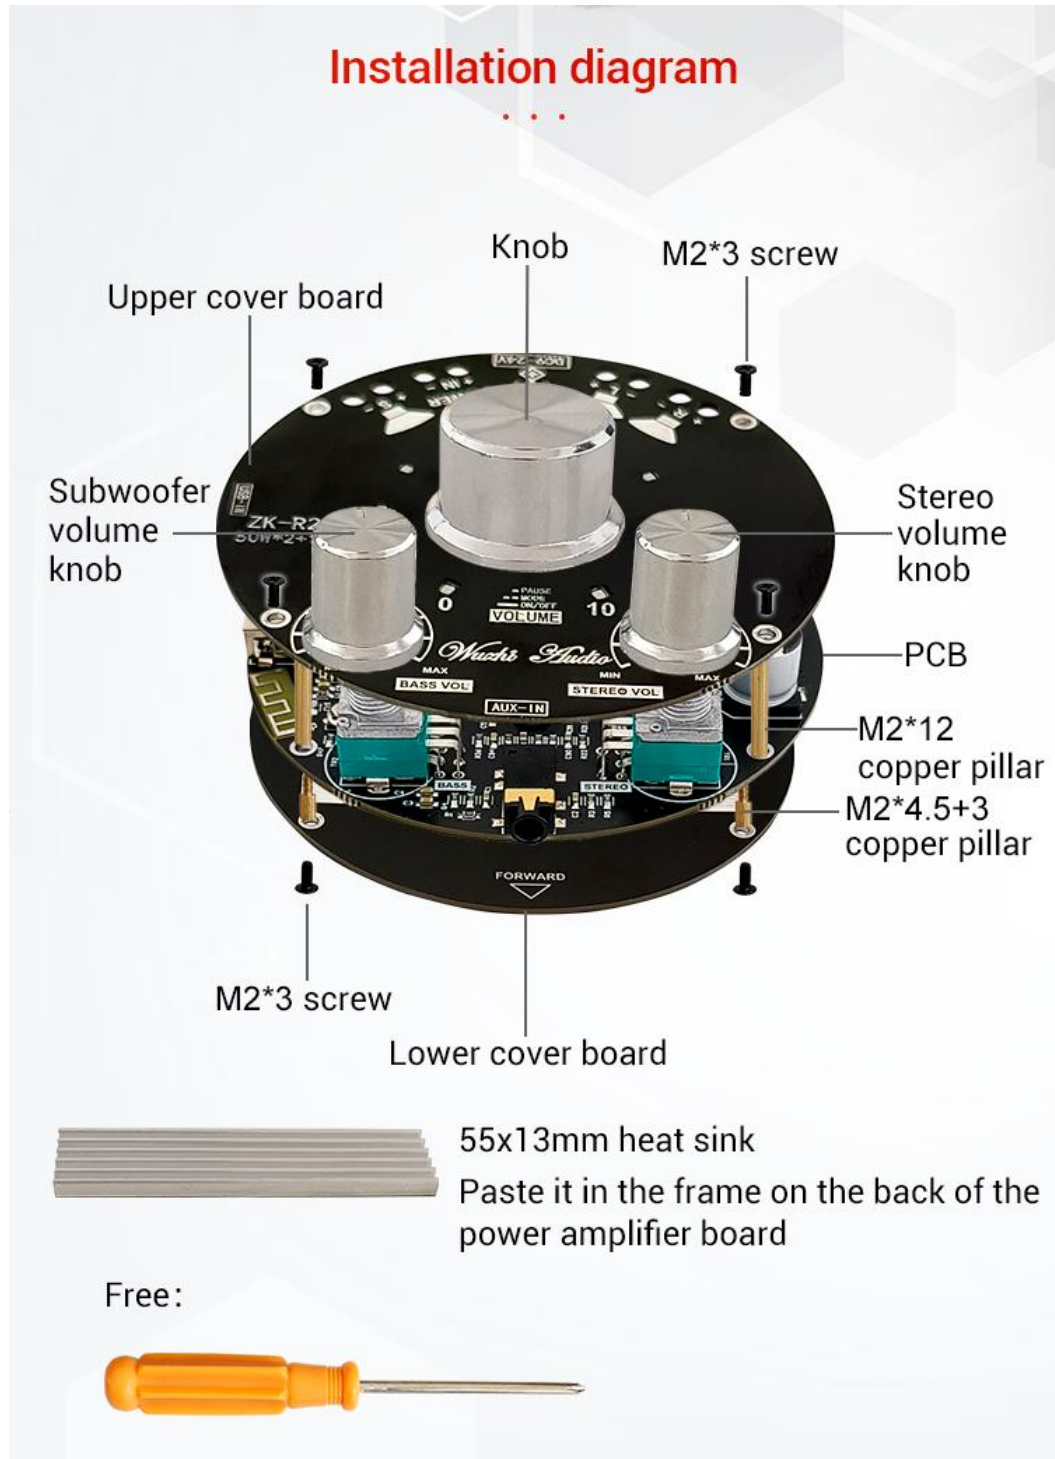

8. APP setting interface

APP setting interface

...

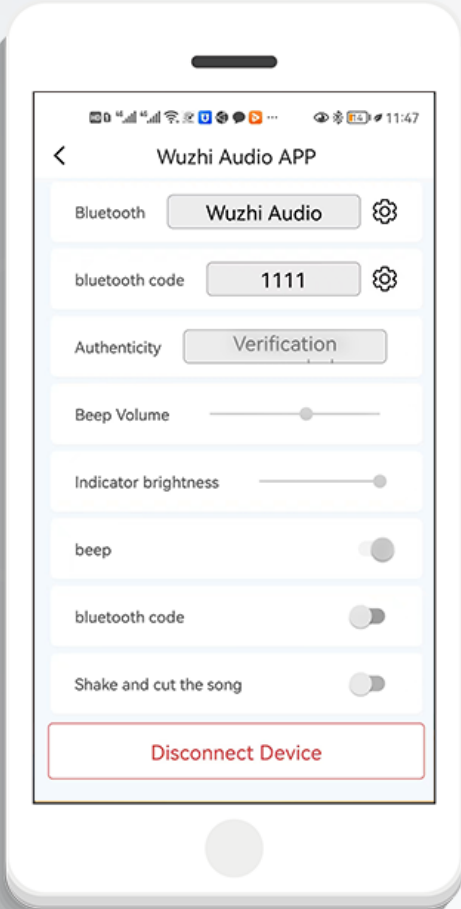

The screenshot shows the 'Wuzhi Audio APP' settings screen. At the top, there's a back arrow and the title 'Wuzhi Audio APP'. Below this, there are several settings sections: 'Bluetooth' with a 'Wuzhi Audio' name and a gear icon; 'bluetooth code' with '1111' and a gear icon; 'Authenticity' with 'Verification' and a gear icon; 'Beep Volume' with a slider; 'Indicator brightness' with a slider; 'beep' with a toggle switch; 'bluetooth code' with a toggle switch; and 'Shake and cut the song' with a toggle switch. At the bottom, there is a red-outlined button labeled 'Disconnect Device'.

BT name modification steps

[enter a new BT name] → [click set button] → [system automatic restart] → [cancel pairing of mobile BT with the original BT name] → [find a new BTname and re pair]

BT password setting steps

Method 1:
[turn on BT password switch] → Use default password 1111

Method 2:
[turn on BT password switch] → [enter password] → [click the setting button] → [the system will restart automatically] → [cancel pairing, and you will be prompted to enter password when connecting again]